


Mounting parts for series

ZX

Head mount ZXB-Ø-01

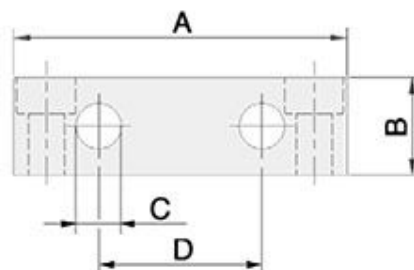


Materials: Al (anodized)


Screws to mount the head mount to the cylinder are included.

The face ports must be plugged when using a head mount.

Cyl.-Ø	A	B	C	D	E	F	G	H	J
25	45	10	5.5	22	36	4.5	5.5	4.5	7.4
32	51	15	7	25	41	7.5	8.5	5.5	9
40	64	15	9	25	49	7.5	8.5	6.5	11
50	89	15	8.5	40	65	12.5	13.5	8.5	15
63	105	15	8.5	50	78	14	15	8.5	15

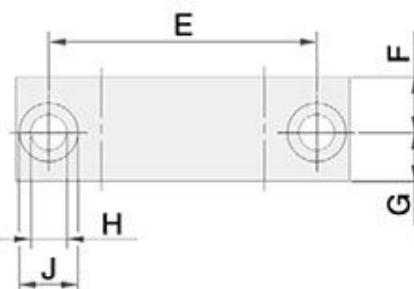

Head mount tall ZXB-Ø-02

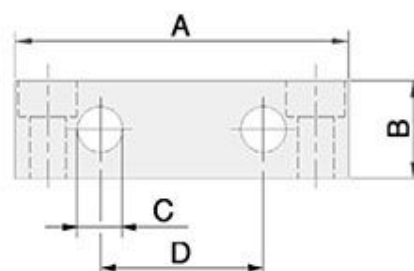


Materials: Al (anodized)

Screws to mount the head mount to the cylinder are included.

The face ports must be plugged when using a head mount.



Cyl.-Ø	A	B	C	D	E	F	G	H	J
25	45	15	5.5	22	36	12.5	5.5	4.5	8
32	51	15	7	25	41	16.5	17.5	5.5	9
40	64	15	9	25	49	17.5	8.5	6.5	11
50	89	15	8.5	40	65	27.5	12.5	8.5	15
63	105	15	8.5	50	78	29	11	8.5	15

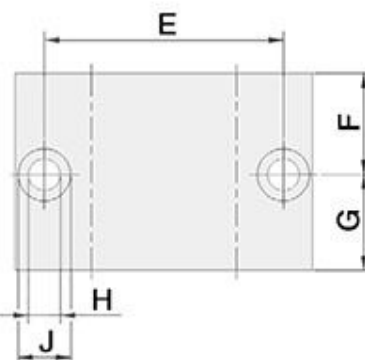

Mounting parts for series

ZX

Center mount ZXB-Ø-10 with ZXB-Ø-02

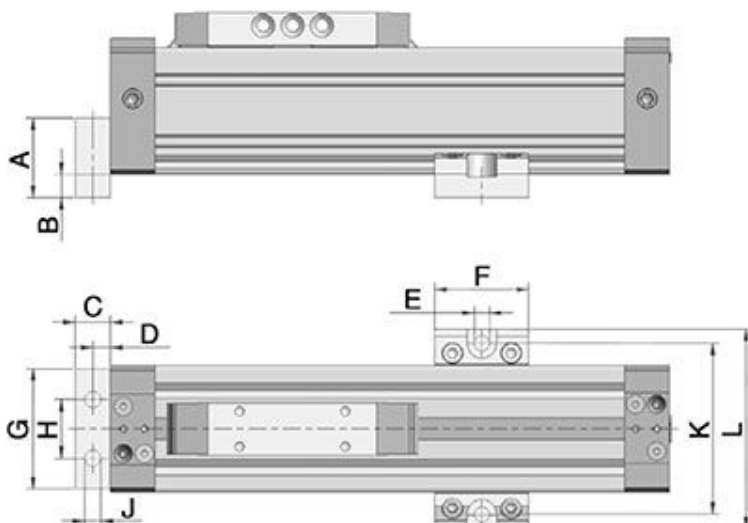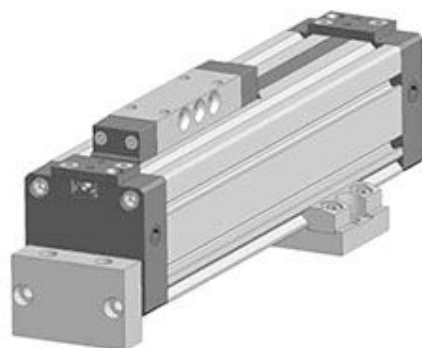

Materials: Al (anodized)


Screws to mount the head mount to the cylinder are included.

The cylinder can be securely mounted by using two center mounts without the need for head mounts.

Due to the symmetric profile of the cylinder-Ø 25, 40, 50 and 63, the center mounts can be used on three sides of the profile. For Ø 32 the center mount ZXB-32-10 is for use opposite of the carriage only. If mounting is required on the other two sides center mount ZXB-32-11 is required.

Cyl.-Ø	A	B	C	D	E	F	G	H	J	K	L
25	18	8	15	7.5	5.5	35	45	22	5.5	60	70
32	34	10	15	7.5	6.6	40	51	25	7	73	85
40	26	10	15	7.5	9	40	64	25	9	90.5	105
50	40	15	15	7.5	11	70	89	40	8.5	120	138
63	40	15	15	7.5	11	70	105	50	8.5	136	154

Center mount tall ZXB-32-11 with ZXB-32-02

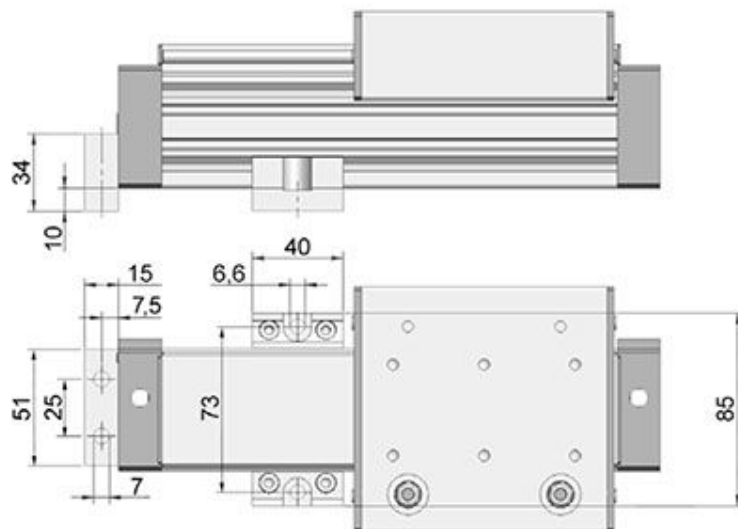

Materials: Al (anodized)

Screws to mount the head mount to the cylinder are included.

The cylinder can be securely mounted by using two center mounts without the need for head mounts.